


| | |
|---------------|-------------------|
| Equipment NO. | 46EH50 |
| Track length | 14.5m+R2.5m90°+7m |
| Cable length | 13m |

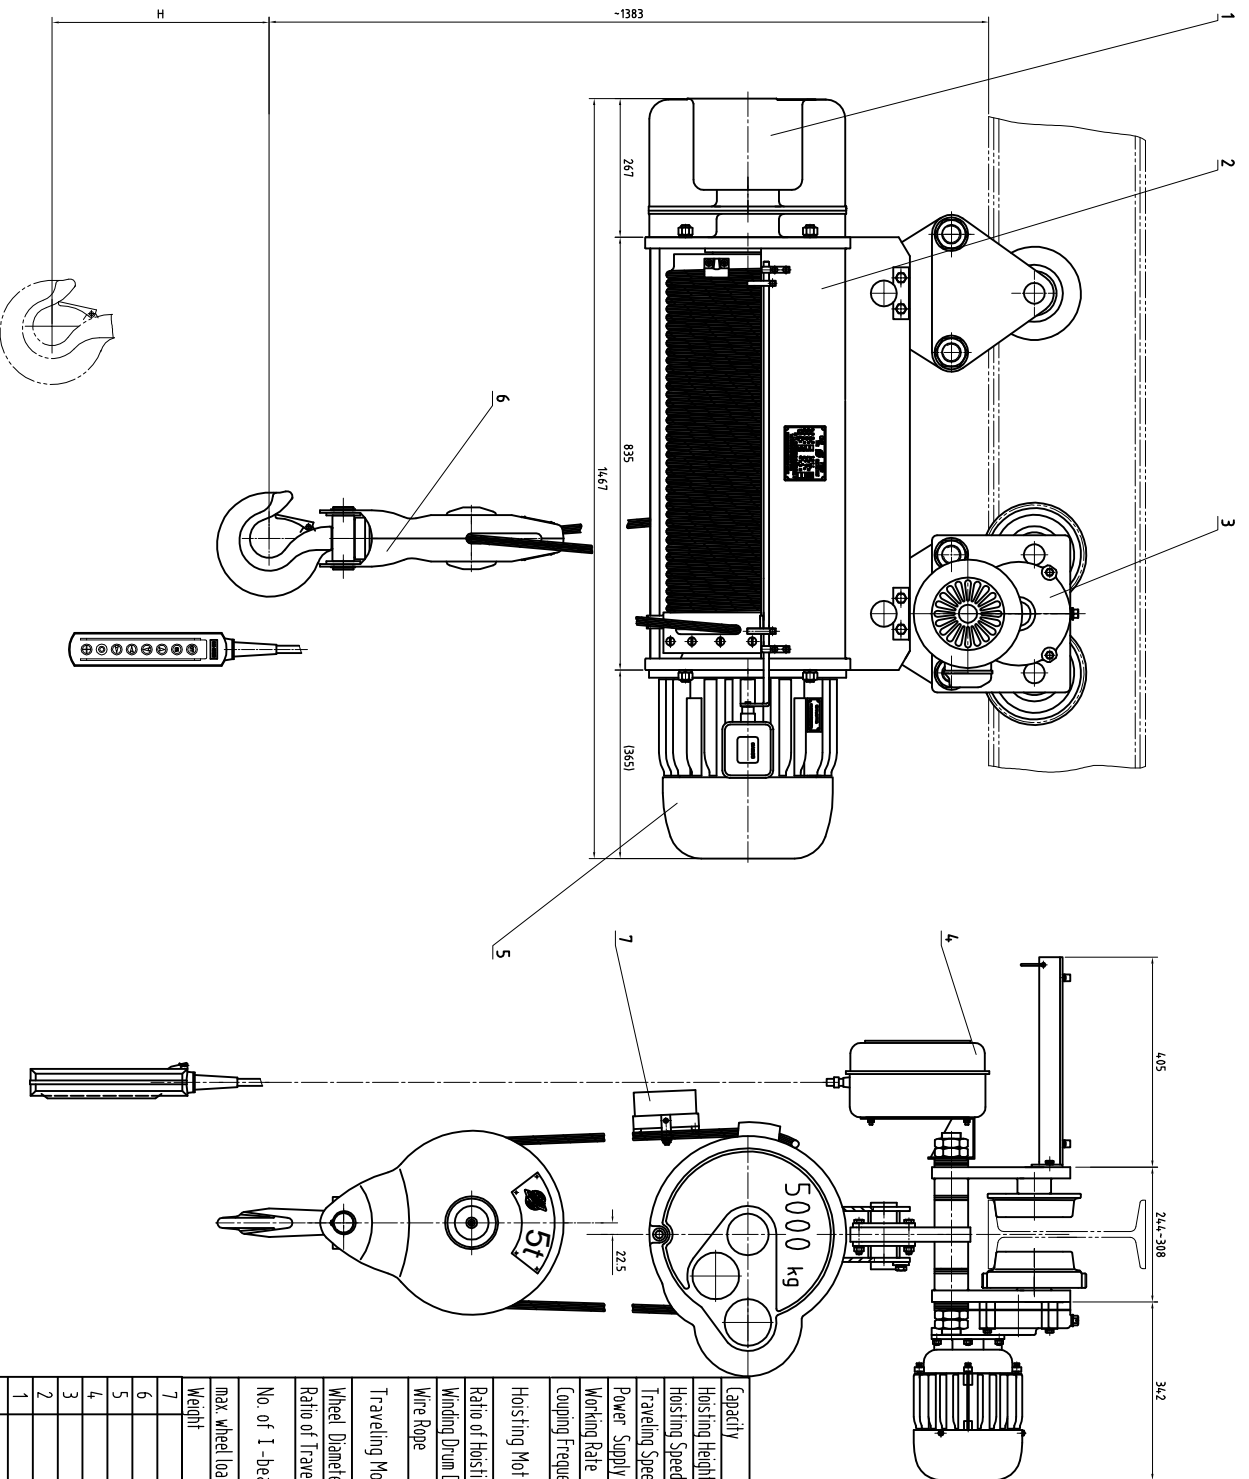

FUNCTION PARAMETER TABLE

| | | |
|----------------------------|----------------------|----------------------|
| Capacity | kg | 5000 |
| Hoisting Height | m | 13 |
| Hoisting Speed | m/min | 9.6 |
| Traveling Speed | m/min | 24 |
| Power Supply | V | 400V 60HZ |
| Working Rate | Jc = 25 % | |
| Coupling Frequency | 1/h | 150 |
| Hoisting Motor | Power kW | 9 |
| | Ratio r/min | 1680 |
| Ratio of Hoisting Reducer | i | 81.2 |
| Winding Drum Diameter | mm | 300 |
| Wire Rope | | 15NAT6x37+FC1670ZS |
| Traveling Motor | Power kW | 0.96 |
| | Ratio r/min | 1656 |
| Wheel Diameter | mm | 154 |
| Ratio of Traveling Reducer | i | 30.5 |
| No. of I-beam | Type | 25gao 63c (GB706-88) |
| | max. wheel load | 2.5 |
| | kg | 2415 |
| | kg | 646 |
| 7 | Overload Limiter | 1 |
| 6 | Hook Setting | 1 |
| 5 | Motor | 1 |
| 4 | Electrical Equipment | 1 |
| 3 | Electric Trolley | 1 |
| 2 | Drum Device | 1 |
| 1 | Reducer | 1 |

| | | | | | | | |
|----------------|--------------|-------|--------|----------|-----|-----|---------|
| NO. | DESCRIP TION | NAME | QTY | MATERIAL | U.W | T.W | REMARKS |
| ELECTRIC HOIST | | | | | | | |
| Model CD-5T | | | | | | | |
| Drawing | | | | | | | |
| Drawn | Checked | Scale | Weight | Scale | | | |
| 1 | 1 | 1:1 | 15 | 15 | | | |
| 1 | 1 | 1:1 | 15 | 15 | | | |